

本图纸为昆山福步工业设备有限公司财产，未经本单位许可不得复制或转给第三者。
This drawing is the property of FBU INDUSTRAL EQUIPMENT (KUNSHAN) CO.,LTD.unauthorized disclosure to any third party or duplication is not permitted.


接口说明 Connection	
BI	缓冲液入口
BO	缓冲液冷出口

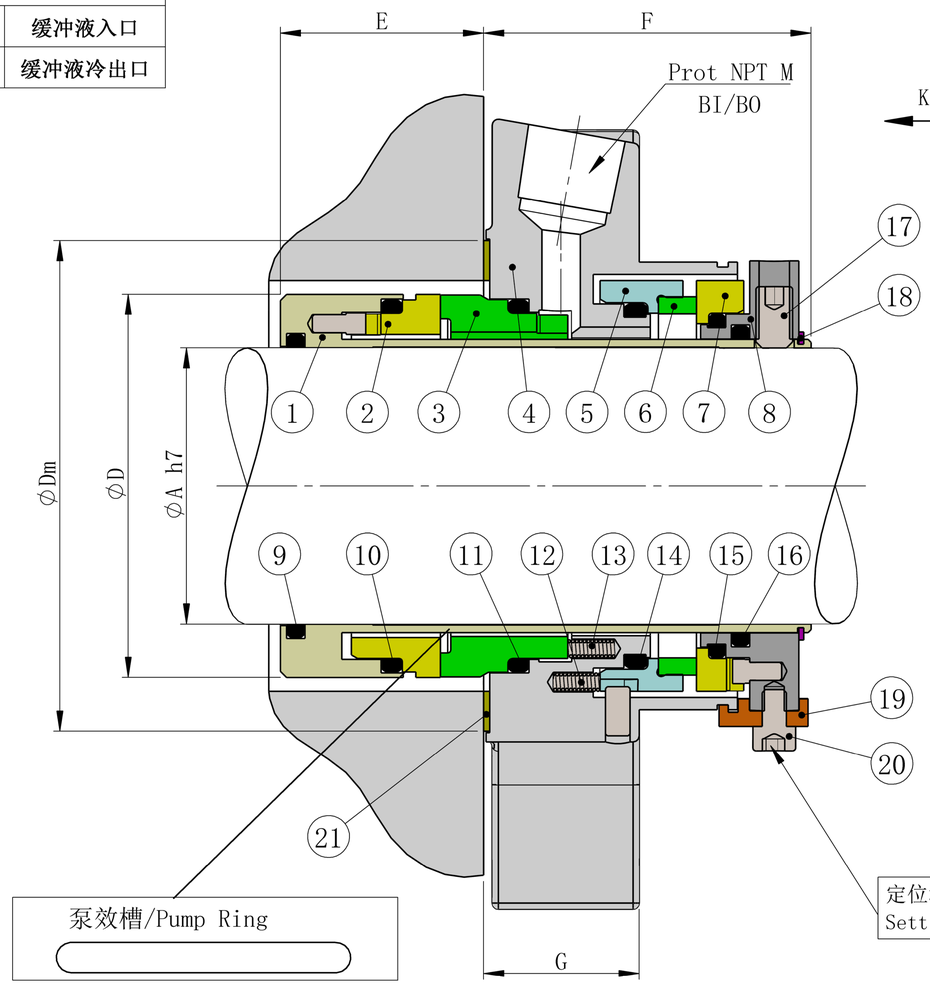

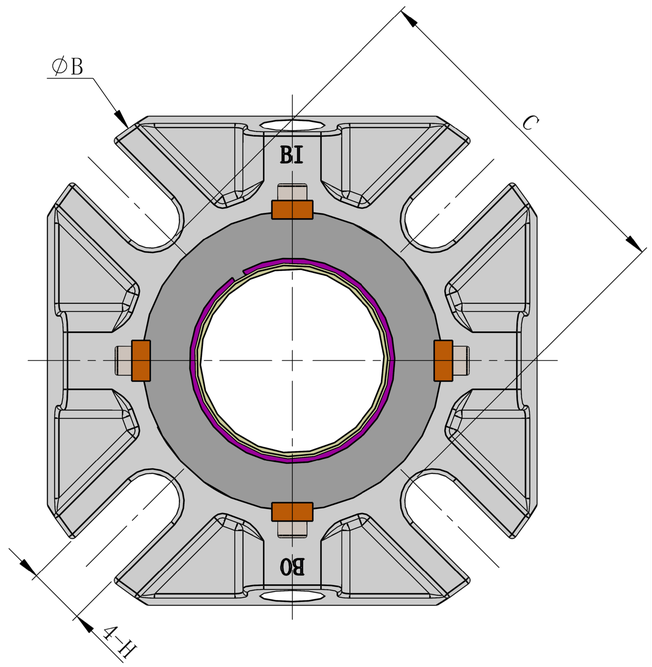

定位块在安装完毕后要移走
Setting clips removed after installation

序号 No	零件名称 Description	材料 Material
1	轴套/Shaft Sleeve	316SS不锈钢/Stainless Steel
2	一级动环/Internal Rotary Face	SSIC/TC
3	一级静环/Internal Stationary Face	Carbon/SSIC/TC
4	压盖/Gland	316SS不锈钢/Stainless Steel
5	二级静环座/External Stationary Seat	316SS不锈钢/Stainless Steel
6	二级静环/External Stationary Face	Carbon
7	二级动环/External Rotary Face	TC
8	定位环/Clamp Ring	316SS不锈钢/Stainless Steel
9	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
10	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
11	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
12	弹簧/Spring	Alloy 276
13	弹簧/Spring	Alloy 276
14	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
15	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
16	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
17	驱动螺钉/Drive Screw	316SS不锈钢/Stainless Steel
18	卡簧/Circlip	316SS不锈钢/Stainless Steel
19	定位块/Setting Clip	铜/Brass
20	定位螺钉/Clip Screw	316SS不锈钢/Stainless Steel
21	垫片/Gasket	非石棉/AF1

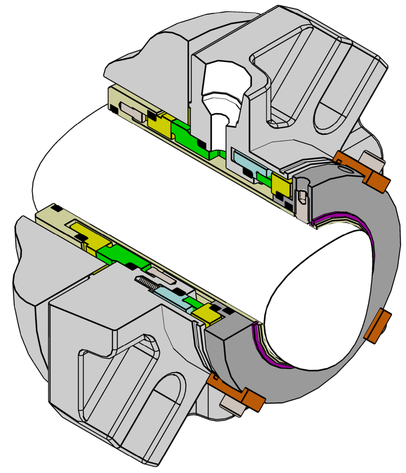

KDC-尺寸信息（mm）

A	B	C	D	Dm	E	F	G	H	M
25	105.0	62.0	43.0	60.0	33.1	53.4	25.5	13.2	1/4″
28	105.0	62.0	46.0	60.0	33.1	53.4	25.5	13.2	1/4″
30	105.0	67.0	48.0	63.0	33.1	53.4	25.5	13.2	1/4″
32	110.0	70.0	50.0	65.0	33.1	53.4	25.5	13.2	1/4″
33	110.0	70.0	50.0	65.0	33.1	53.4	25.5	13.2	1/4″
35	113.0	72.0	53.0	68.0	33.1	53.4	25.5	13.2	1/4″
38	135.0	80.0	56.0	73.0	33.1	53.4	25.5	13.2	3/8″
40	135.0	80.0	58.0	73.0	33.1	53.4	25.5	14.2	3/8″
43	135.0	80.0	61.0	75.5	33.1	53.4	25.5	14.2	3/8″
45	138.0	82.5	62.5	80.0	33.1	53.4	25.5	14.2	3/8″
48	138.0	82.5	65.5	82.0	33.1	53.4	25.5	14.2	3/8″
50	150.0	87.0	68.0	85.0	33.1	53.4	25.5	14.2	3/8″
53	150.0	97.0	72.0	93.0	33.1	53.4	25.5	18.0	3/8″
55	150.0	97.0	73.0	88.0	33.1	53.4	25.5	18.0	3/8″
60	157.0	102.0	78.0	98.5	33.1	53.4	25.5	18.0	3/8″
65	165.0	109.0	84.8	107.0	33.1	53.4	25.5	18.0	3/8″
70	178.0	118.5	93.0	116.0	33.1	53.4	25.5	18.0	3/8″
75	190.0	129.0	100.0	125.0	44.1	63.9	28.0	18.0	3/8″
80	195.0	135.0	106.4	131.0	44.1	63.9	28.0	18.0	3/8″
85	198.0	139.0	109.5	135.0	44.1	63.9	28.0	22.0	3/8″
90	205.0	145.0	115.9	142.0	44.1	63.9	28.0	22.0	3/8″
95	208.0	148.0	119.1	147.0	44.1	63.9	28.0	22.0	3/8″
100	218.0	154.0	125.4	151.0	44.1	63.9	28.0	22.0	3/8″

KDC-尺寸信息（Inches）

A	B	C	D	Dm	E	F	G	H	M
1.000	4.134	2.441	1.693	2.362	1.303	2.102	1.004	0.520	1/4″
1.125	4.134	2.441	1.811	2.362	1.303	2.102	1.004	0.520	1/4″
1.250	4.331	2.756	1.969	2.559	1.303	2.102	1.004	0.520	1/4″
1.375	4.449	2.835	2.087	2.677	1.303	2.102	1.004	0.520	1/4″
1.500	5.315	3.150	2.205	2.874	1.303	2.102	1.004	0.520	3/8″
1.625	5.315	3.150	2.402	2.972	1.303	2.102	1.004	0.559	3/8″
1.750	5.433	3.248	2.461	3.150	1.303	2.102	1.004	0.559	3/8″
1.875	5.433	3.248	2.579	3.228	1.303	2.102	1.004	0.559	3/8″
2.000	5.906	3.818	2.677	3.780	1.303	2.102	1.004	0.559	3/8″
2.125	5.906	3.819	2.874	3.465	1.303	2.102	1.004	0.709	3/8″
2.375	6.181	4.016	3.071	3.878	1.303	2.102	1.004	0.709	3/8″
2.500	6.496	4.291	3.339	4.213	1.303	2.102	1.004	0.709	3/8″
2.625	6.496	4.291	3.339	4.213	1.303	2.102	1.004	0.709	3/8″
2.750	7.008	4.665	3.661	4.567	1.303	2.102	1.004	0.709	3/8″
2.875	7.283	4.960	3.858	4.921	1.736	2.516	1.102	0.709	3/8″
3.000	7.480	5.079	3.937	4.921	1.736	2.516	1.102	0.709	3/8″
3.125	7.677	5.315	4.189	5.157	1.736	2.516	1.102	0.709	3/8″
3.250	7.677	5.315	4.189	5.157	1.736	2.516	1.102	0.709	3/8″
3.375	7.795	5.472	4.311	5.315	1.736	2.516	1.102	0.866	3/8″
3.500	7.795	5.591	4.500	5.315	1.736	2.516	1.102	0.866	3/8″
3.625	8.071	5.709	4.563	5.591	1.736	2.516	1.102	0.866	3/8″
3.750	8.189	5.827	4.689	5.787	1.736	2.516	1.102	0.866	3/8″
4.000	8.583	6.063	4.937	5.945	1.736	2.516	1.102	0.866	3/8″

未注公差按照 General tolerance Per ISO 2768-m	名义尺寸 Nominal dimensions [mm]	0.5-6	>6-30	>30-120	>120-400	>400-1000	>1000-2000
	公差 Tolerances [mm]	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2

Format/图幅 DIN EN ISO 216 A3 | 第一视角 Projection Method 1 | 表面粗糙度表示方法符合 Method of indicating surface to ISO1302(μm) | 公差符合 Tolerances according to ISO 2768-m

标记 NO.	处数 QTY.	描述 Description	日期 Date	姓名 Name
1				
2				
3				
4				

昆山福步工业设备有限公司
FBU INDUSTRAL EQUIPMENT (KUNSHAN) CO., LTD.

	日期 Date	姓名 Name
设计 Design	2021/8/31	赵丹丹
校核 Checked		
审核 Approved		
公差带 Tolerance: ISO 8015	比例 Scale: 1:1	材料标记 Matrial Code

规格型号/TYPE NO.: KDC
机械密封
质量/Weight: 4318.68 g
图号/Drawing NO.:
版本: Rev. A